CC215 / CC230

12 inch Subcardioid Constant Curvature Loudspeakers



Overview

The CC Series is comprised of two full range models: CC215 and CC230. They are subcardioid constant curvature loudspeakers intended for permanent installation in a wide range of venues. They include a neodymium 12 inch woofer and 3 inch compression driver. The compression driver is mounted to a Medusa Waveformer, which ensures that arrays function as a cohesive unit, providing powerful, focused, and uniform sound distribution across large spaces. A lightweight design, fixed angles, and a variety of rigging options make setup fast and efficient. Integrated system design within Fulcrum One software streamlines system modeling, configuration, and deployment enhancing efficiency and accuracy in project planning.

CC Series loudspeakers incorporate Fulcrum's Passive Cardioid Technology™. Unlike active cardioid loudspeakers, passive cardioid technology does not require an additional amplifier channel or additional enclosure volume to achieve its impressive low frequency directional control. The subcardioid behavior is produced by a meticulously conceived acoustical circuit which balances the loading of the low frequency driver, the enclosure depth and volume, and specially constructed side-mounted ports which include a calibrated resistive element. By opting for a subcardioid pattern as opposed to a pure, hyper or super cardioid pattern, the rear rejection increases when the modules are deployed as a curved array.

Proprietary **TQ**™ Processing DSP technology delivers crystal-clear audio across all frequencies. TQ Processing is compatible with a wide range of DSP and amplifier platforms, offering system design flexibility.

When used with Driveflex amplifiers and Fulcrum One software, CC Series arrays are modeled, optimized, deployed, and controlled as part of an integrated system. TQ presets and limiters are automatically applied, including advanced array limiter protection. The Optimization function in Fulcrum One adjusts array behavior to extend and smooth coverage across listening areas and enables custom voicing profiles. These parameters are automatically loaded into connected Driveflex amplifiers, which are managed through Fulcrum One software. This integrated workflow simplifies setup and maintains consistent performance across the array.

Performance Specifications[1]

Operating Mode

Single-amplified w/ DSP

Operating Range [2]

58 Hz to 20 kHz

Nominal Beamwidth

Horizontal: 100°
Vertical: 15° (CC215) / 30° (CC230)

Transducers

LF: 12.0" neodymium magnet cone driver, 3.0" voice coil
HF: 3.0" titanium diaphragm, neodymium magnet compression driver

Power Handling @ Nominal Impedance [3]

57 V / 400 W @ 8 Ω

Recommended Power Amplifier

400 W to 800 W @ 8 Ω

Maximum Peak SPL [4]

CC215: 142 dB
CC230: 141 dB
** Single box, Array preset, 50 Hz HPF*

Physical Specifications

Connections

(2) Neutrik NL4 Speakon
Pin 1+/-: Full Range Pin 2+/-: NC

Mounting / Suspension Points

(16) M10 x 1.5 eye bolt angle points, (2) M10 x 1.5 yoke points, (1) M10 x 1.5 pull back point

Dimensions / Weight

See pages 3 & 4

Finish


Black painted enclosure w/ matte black grille

Options

Terminal strip input, Custom color finish,
IP55 Weather-resistant (WR) enclosure & hardware

Connections

Neutrik NL4 Speakon Input

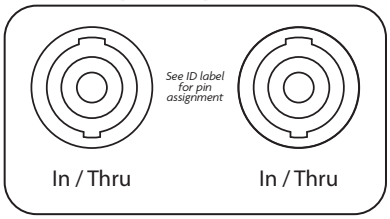

Mechanical Specification Drawings

2D and 3D DWG dimensional drawings are available for download at www.fulcrum-acoustic.com/resources

Accessories

VAFK
Vertical array frame kit for CC215, CC230, and CCS18. Includes reversible extension bar. Use to suspend up to eight (8) loudspeaker enclosures.*

CY-CC2
Cluster yoke bracket kit. Use to mount two (2) of any combination CC215/CC230 to overhead structure.

YK-CC2
Standard yoke bracket for CC215 and CC230. Use to mount one (1) of either loudspeaker to overhead structure. Not to be used for wall mounting.

AY-CC2
Array yoke bracket kit for CC215 or CC230. Usable in pairs (2) to suspend arrays up to maximum four (4) CC215 and/or CC230 or as a pull-back attachment when using VAFK.*

LBK215
Standard link bar kit for CC215. Connects CC215 below VAFK, CC215, CC230, or CCS18.

LBK215-EXT
Extension link bar kit for CC215. Connects CC215 below another CC215 at a reduced splay angle of 10 degrees. Not to be used to connect below VAFK, CC230, or CCS18.

LBK215-AY
Array yoke link bar kit for CC215. Connects CC215 below AY-CC2.

LBK230
Standard link bar kit for CC230. Connects CC230 below VAFK, CC215, CC230, or CCS18.

LBK230-AY
Array yoke link bar kit for CC230. Connects CC230 below AY-CC2.

* *Use the CC rigging calculator to determine acceptable configurations of enclosures.*

Notes

[1] **Performance Specifications** *All acoustic specifications rounded to nearest whole number. External DSP with Fulcrum Acoustic-provided settings is required to achieve the specified performance.*


[2] **Operating Range** *The frequency range within which the processed response is within 10 dB of the average.*

[3] **Power Handling** *Based on the AES power handling of the transducers.*

[4] **Maximum Peak SPL** *Signal source is AES75 Music Noise, measured at 2 meters and scaled to 1 meter with no weighting. The maximum SPL that can be achieved under real-world conditions depends on a number of factors, including array size and shape, distance to the listener, nature of the source material for tests (its spectrum and peak-to-average ratio), SPL meter settings (e.g. A, C, flat, LEQ), and signal processing settings. No single number can encapsulate all these variables. Please refer to Fulcrum One design software to explore SPL capabilities of a specific system design.*

Notes:
1. Net Weight = Approx. 46.5 lb / 21.1 kg
2. Symbol ◎ = M10 x 1.5 eye bolt angle point
3. Symbol ○ = M10 x 1.5 nut plate
4. Symbol ◓ = CoG

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 05/21/25
2	Update weight, CoG, & yoke point location	RAF 09/26/25

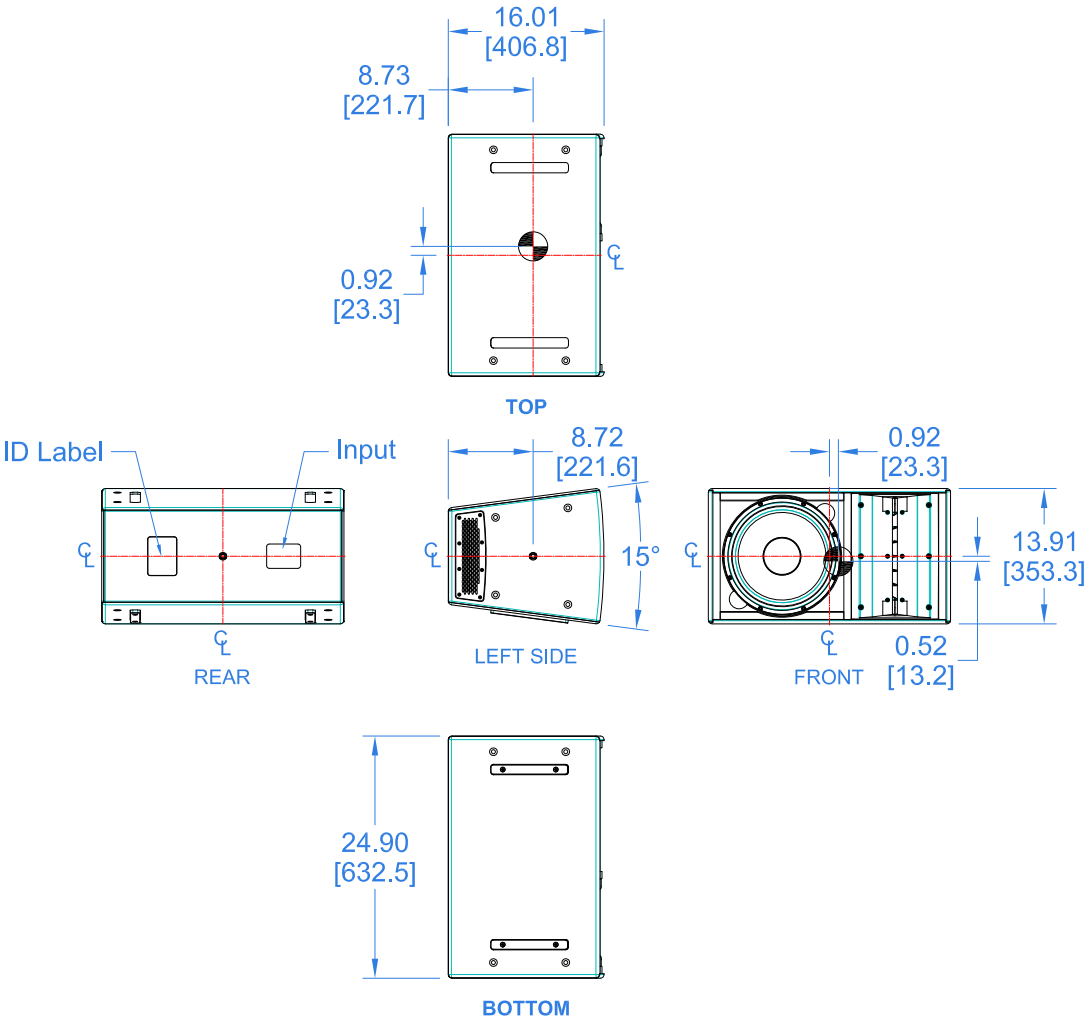

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION.
DO NOT SCALE DRAWING.

DRAWN BY: DEW | DATE: 05/13/25

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
X.X±.1 X.XX±.015 X.XXX±.005
FRACTIONS ±1/32 ANGLES ±1/2°

(X.XX) = REF DIMS
NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

FULCRUM ACOUSTIC, LLC
1 MAIN STREET WHITINSVILLE, MA 01588 USA

TITLE: Mechanical Spec, CC215


A | SHEET 1 OF 1 | SCALE: 1 : 16

DWG. NO. 820-100-187 | REV 2

Drawing is reduced. Do not scale.

Notes:
1. Net Weight = Approx. 44.0 lb / 20.0 kg
2. Symbol ◎ = M10 x 1.5 eye bolt angle point
3. Symbol ○ = M10 x 1.5 nut plate
4. Symbol ◓ = CoG

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 05/21/25
2	Update weight & CoG	RAF 09/26/25

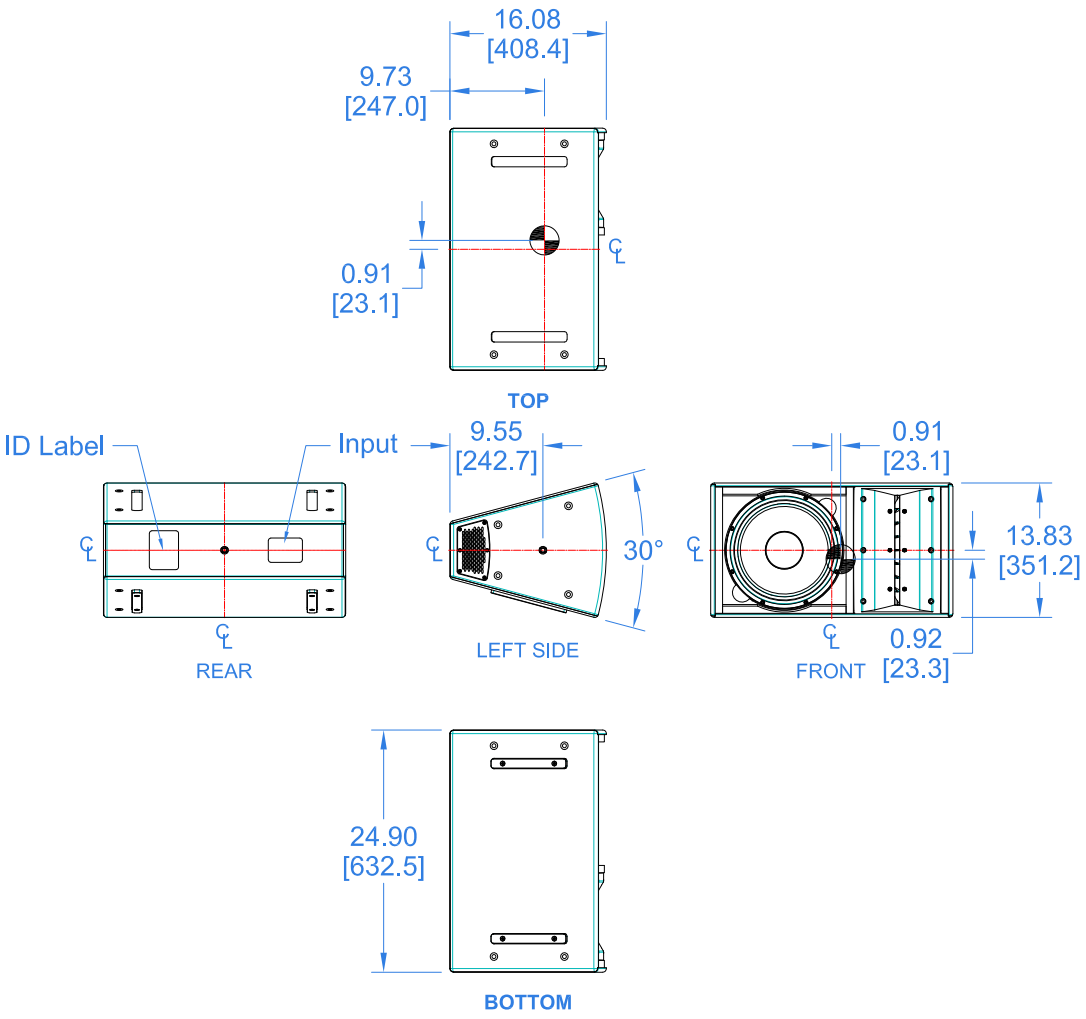


THIRD ANGLE PROJECTION  THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING. DRAWN BY: DEW DATE: 05/13/25	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET WHITINSVILLE, MA 01588 USA TITLE: Mechanical Spec, CC230 A | SHEET 1 OF 1 | SCALE: 1 : 16 DWG. NO. 820-100-188 | REV 2

Drawing is reduced. Do not scale.

Notes:
1. Net Weight = Approx. 39.0 lb / 17.7 kg
2. Material: 0.187" & 0.50" A36 Steel
3. VAFK includes (2) 3/8" screw pin anchor shackles
4. To mount extension bar, place flat and split washers over (8) M6 screws (supplied) as shown in Fig. 1 and tighten screws to specified torque
5. To mount LBK link bars (not included), place flat and split washers over (6) M10 screws (supplied) as shown in Fig. 2 and tighten screws to specified torque


REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	NEW ISSUE	RAF 7/2/25
2	UPDATE DRAWING PART NUMBER	RAF 1/16/26
3	UPDATE DRAWING PART NUMBER	RAF 3/24/26

Fig. 1

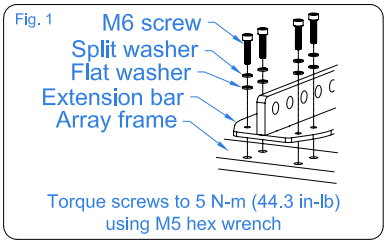

Torque screws to 5 N-m (44.3 in-lb) using M5 hex wrench

Fig. 2

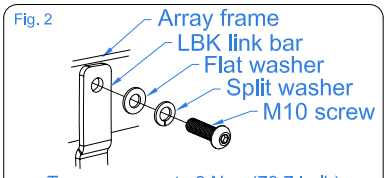


Torque screws to 9 N-m (79.7 in-lb) using M6 hex wrench


THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES .X±.1 .XX±.015 .XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMETRICAL	STATUS RELEASED	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA
		APPROVALS / DATE	
		DRAWN: RAF 7/2/25	TITLE: Mech Spec, VAFK Vertical Array Frame Kit
		CHECKED:	
		DES ENG:	B SHEET 1 OF 1 SCALE: 1:16
THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOU WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.		MFG ENG:	DWG. NO. 820-300-062 REV 3


Drawing is reduced. Do not scale.

Notes:
1. Net Weight: Approx. 21.5 lb / 9.8 kg
2. Material: 0.1875" thick ASTM A36 steel
3. CY-CC2 includes (1) yoke bracket, (2) pivot plates, (4) M10 button head hex screws, and (12) each flat washers and split washers
4. CY-CC2 may be used to mount (2) of any combination CC215/CC230 to overhead structure; do not use for wall-mount applications
5. Stack (2) CC2xx in desired orienation; remove top (2) button head screws from upper enclosure and bottom (2) button head screws from lower enclosure
6. Using screws removed in step 5 above, place flat & split washers as shown in Fig. 1, install pivot plates, and tighten screws to specified torque
7. Place M10 flat & split washers over (4) M10 button head screws supplied with CY-CC2 and mount bracket to pivot plates as shown in Fig. 1; set desired tilt angle of cluster and tighten screws to specified torque


REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 10/10/25
2	Update hardware geometry	RAF 03/25/26
3	Update model name	RAF 07/01/26

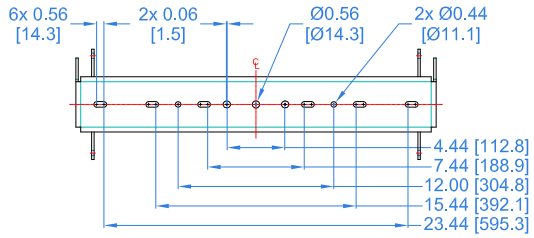

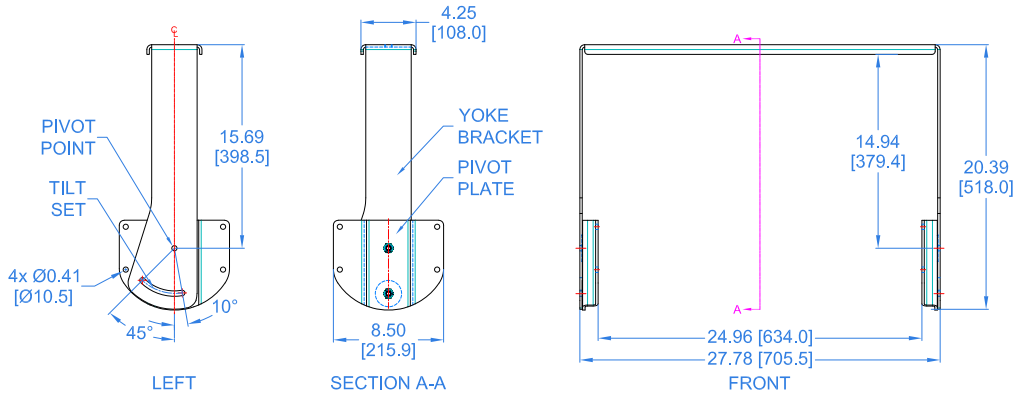

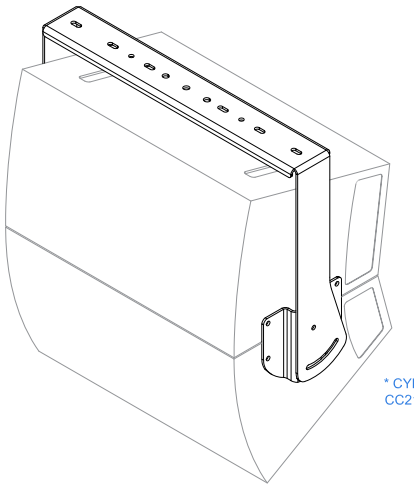

* CYBK shown with CC215 and CC230

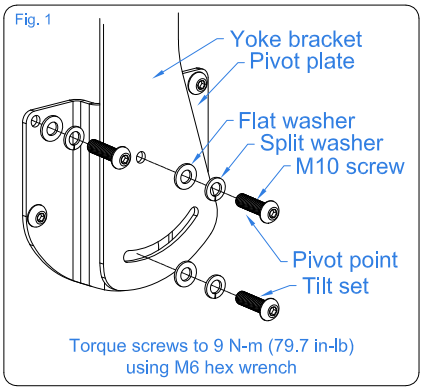



THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA
THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.		TITLE: Mech Spec, CY-CC2 Cluster Yoke Bracket
DRAWN BY: RAF DATE: 03/25/26		A SHEET 1 OF 1 SCALE: 1 : 12
		DWG. NO. 820-300-073 REV 3


Drawing is reduced. Do not scale.


Notes:
1. Net Weight: Approx. 9.0 lb / 4.1 kg
2. Material: 8 GA ASTM A36 steel
3. Bracket includes (2) each M10 button head hex screws, flat washers, and split washers
4. YK-CC2 may be used to mount (1) CC215 or CC230 to overhead structure; do not use for wall-mount applications
5. Remove center M10 flat head screw from each side and discard
6. Place flat & split washers over supplied M10 button head hex screws as shown in Fig. 1 and tighten bolts to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/23/26

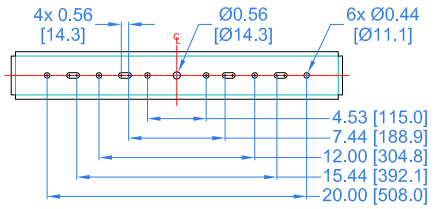


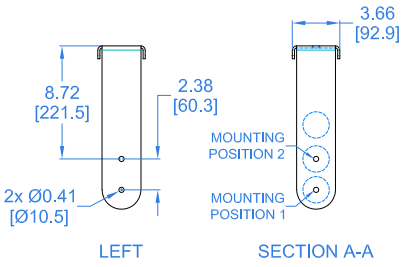

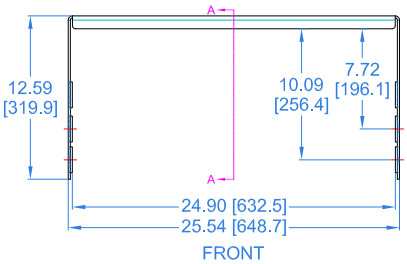

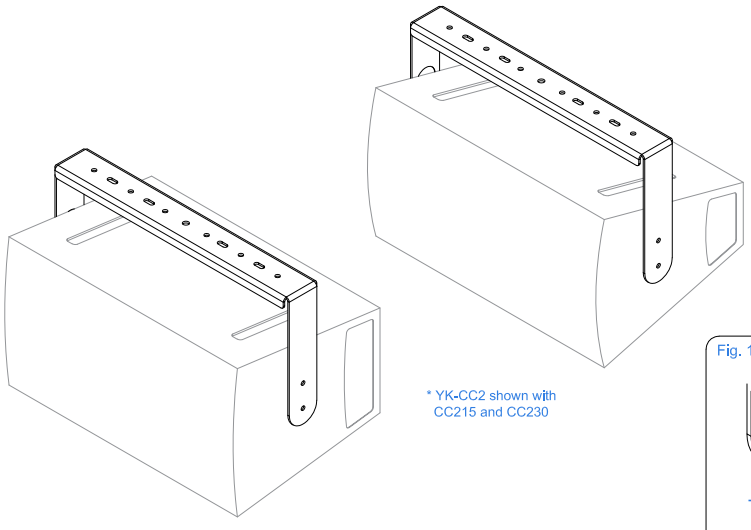

* YK-CC2 shown with CC215 and CC230

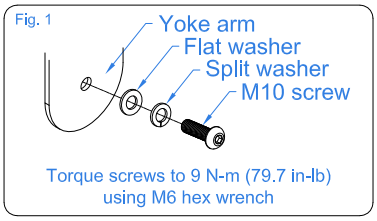

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION.
DO NOT SCALE DRAWING.

DRAWN BY: RAF DATE: 03/23/26

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
X.X±.1 X.XX±.015 X.XXX±.005
FRACTIONS ±1/32 ANGLES ±1/2°

(X.XX) = REF DIMS
NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

FULCRUM ACOUSTIC, LLC
1 MAIN STREET, WHITINSVILLE, MA 01588 USA

TITLE: Mech Spec, YK-CC2 Standard Yoke Bracket


A | SHEET 1 OF 1 | SCALE: 1 : 12

DWG. NO. 820-300-071 | REV 1

Drawing is reduced. Do not scale.

Notes:
1. Net Weight: Approx. 4.0 lb / 1.8 kg
2. Material: 0.187" A36 steel
3. Bracket includes (2) 3/8" screw pin anchor shackles
4. AY-CC2 may be used to suspend arrays up to maximum (4) CC215 and/or CC230
5. Remove (2) M10 button head hex screws (one per side of loudspeaker) from link bars and reuse to attach bracket
6. Place (2) M10 flat & split washers (supplied with AY-CC2 bracket) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/18/26

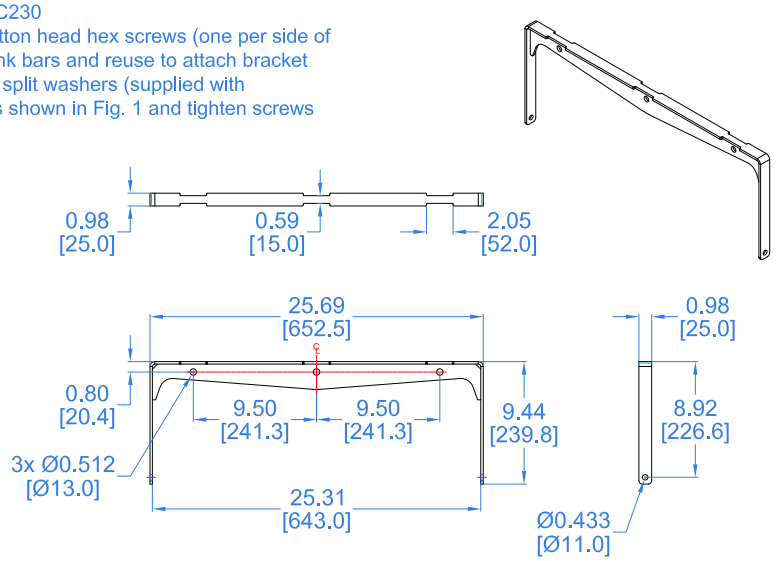


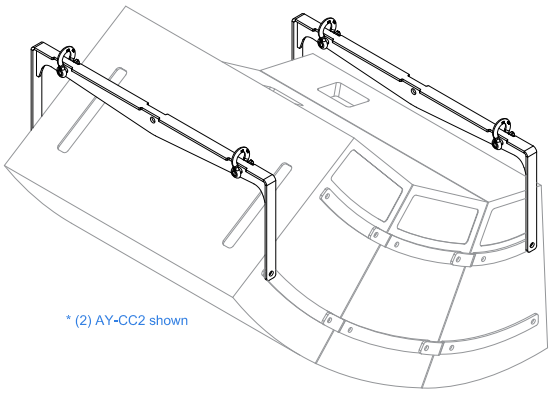


Fig. 1



Torque screws to 9 N-m (79.7 in-lb) using M6 hex wrench

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION.
DO NOT SCALE DRAWING.

DRAWN BY: RAF | DATE: 03/18/26

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
X.X±.1 X.XX±.015 X.XXX±.005
FRACTIONS ±1/32 ANGLES ±1/2°

(X.XX) = REF DIMS
NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

FULCRUM ACOUSTIC, LLC
1 MAIN STREET, WHITINSVILLE, MA 01588 USA

TITLE: Mech Spec, AY-CC2 Array Yoke Bracket


A	SHEET 1 OF 1	SCALE: 1 : 12

DWG. NO. 820-300-070 | REV 1

Drawing is reduced. Do not scale.

Notes:
1. Material: 0.187" A36 steel
2. FL = Front Left, FR = Front Right
3. RL = Rear Left, RR = Rear Right
4. Remove (8) M10 button head hex screws (four per side of loudspeaker) and reuse to attach brackets
5. Place (8) M10 flat & split washers (supplied with LBK215 kit) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/17/26

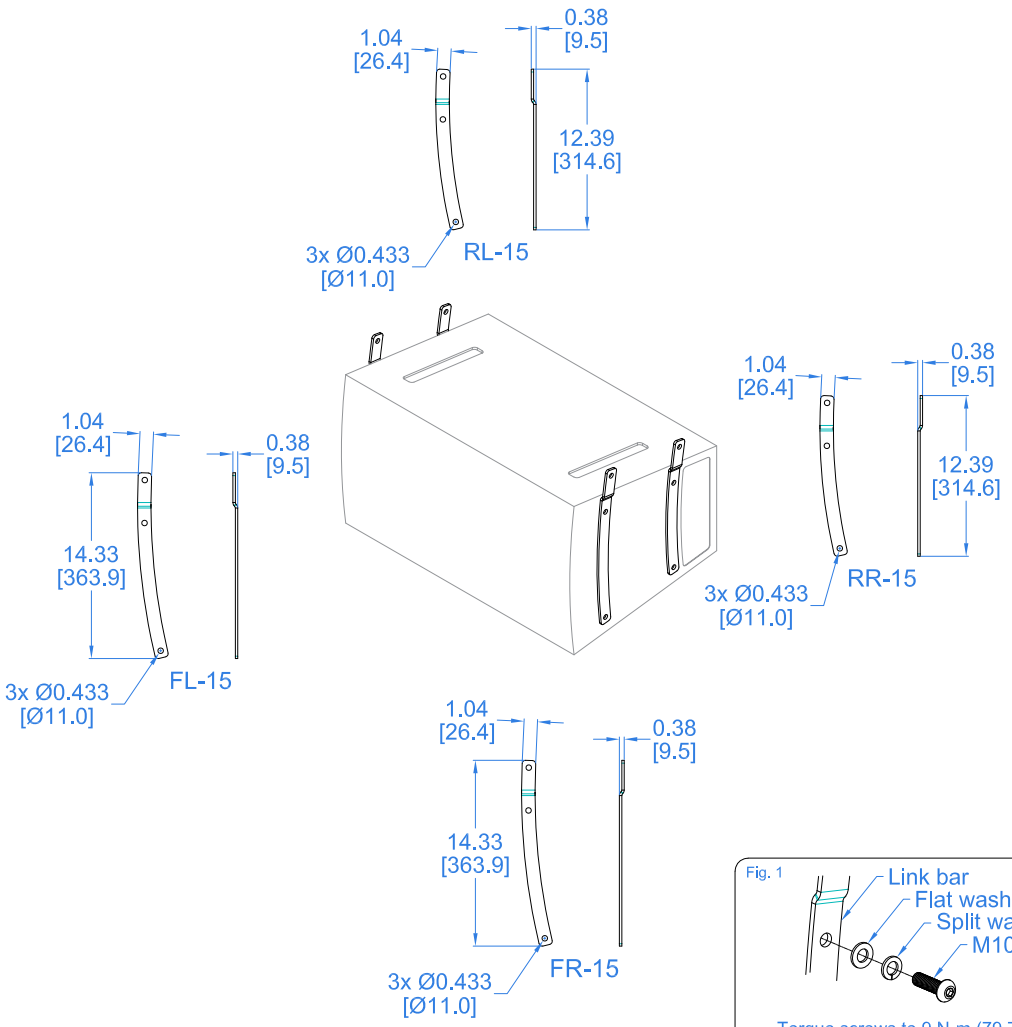

THIRD ANGLE PROJECTION  THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING. DRAWN BY: RAF DATE: 03/17/26	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA TITLE: Mech Spec, LBK215 Link Bar Kit A | SHEET 1 OF 1 | SCALE: 1 : 12 DWG. NO. 820-300-063 | REV 1

Drawing is reduced. Do not scale.

Notes:
1. Material: 0.187" A36 steel
2. FL = Front Left, FR = Front Right
3. RL = Rear Left, RR = Rear Right
4. Remove (8) M10 button head hex screws (four per side of loudspeaker) and reuse to attach brackets
5. Place (8) M10 flat & split washers (supplied with LBK215-EXT kit) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/17/26

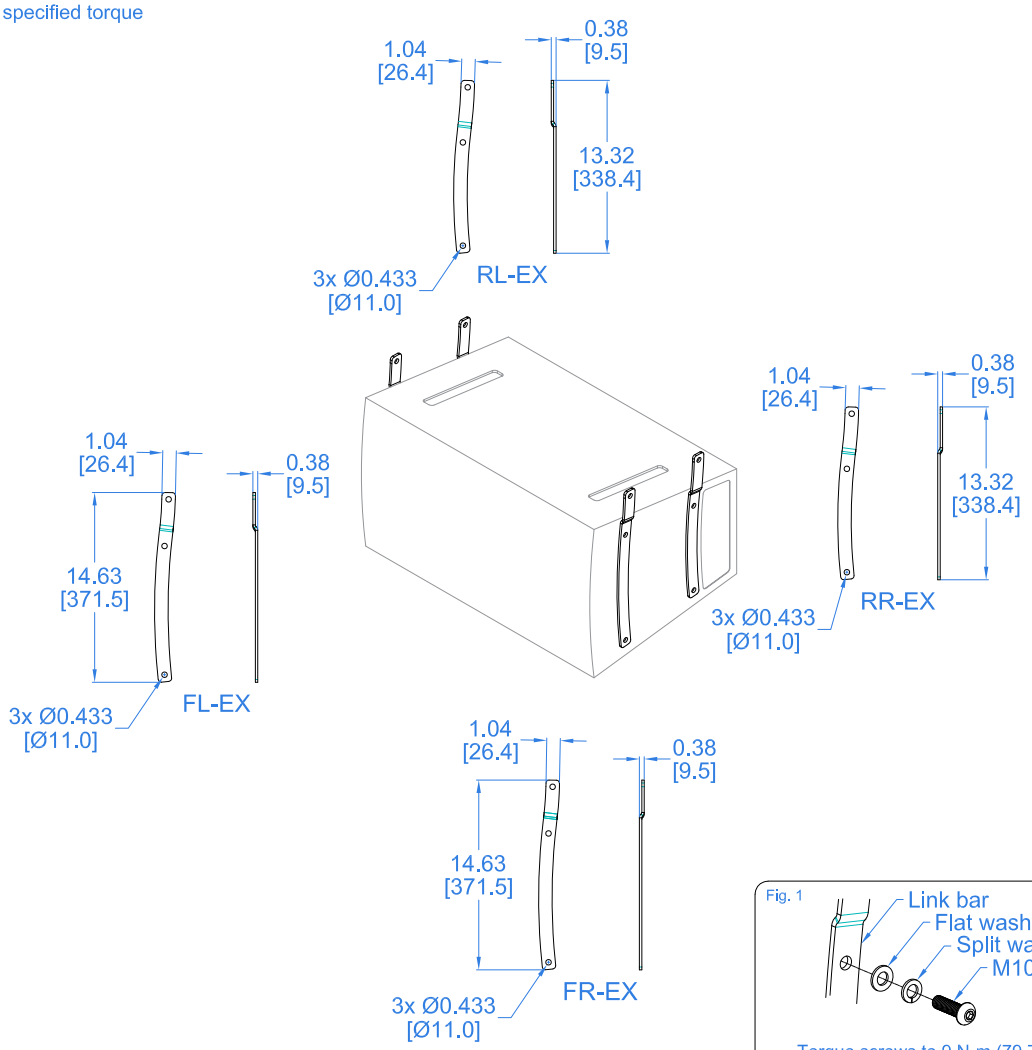


Fig. 1

Torque screws to 9 N-m (79.7 in-lb) using M6 hex wrench

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA
THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.		TITLE: Mech, Spec, LBK215-EXT Link Bar Kit
DRAWN BY: RAF DATE: 03/17/26		A SHEET 1 OF 1 SCALE: 1 : 12
		DWG. NO. 820-300-064 REV 1

Drawing is reduced. Do not scale.

Notes:
1. Material: 0.187" A36 steel
2. Kit includes (2) front and (2) rear brackets
3. Remove (8) M10 button head hex screws (four per side of loudspeaker) and reuse to attach brackets
4. Place (8) M10 flat & split washers (supplied with LBK215-AY kit) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/18/26

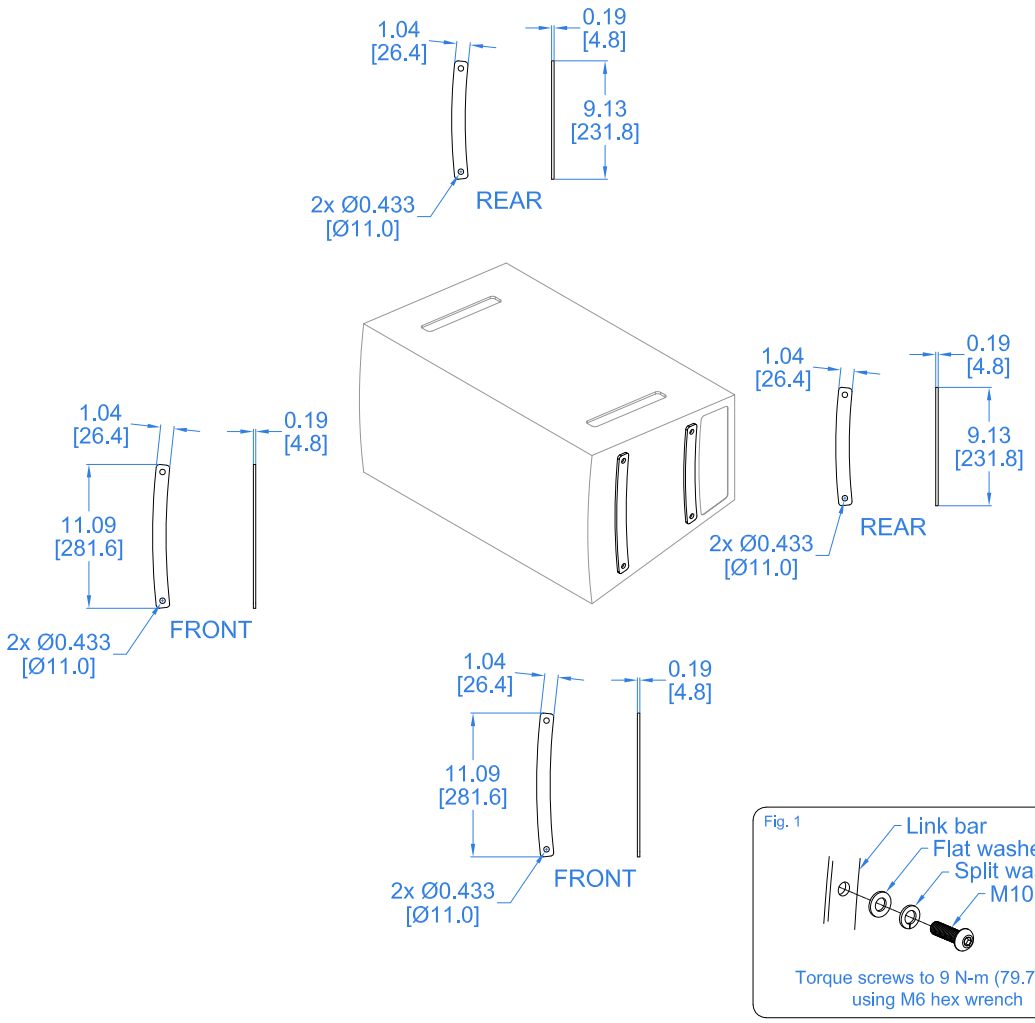


Fig. 1

Torque screws to 9 N-m (79.7 in-lb) using M6 hex wrench

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.

DRAWN BY: RAF DATE: 03/18/26

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
X.X±.1 X.XX±.015 X.XXX±.005
FRACTIONS ±1/32 ANGLES ±1/2°

(X.XX) = REF DIMS
NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

FULCRUM ACOUSTIC, LLC
1 MAIN STREET, WHITINSVILLE, MA 01588 USA

TITLE: Mech Spec, LBK215-AY Link Bar Kit


A | SHEET 1 OF 1 | SCALE: 1 : 12


DWG. NO. 820-300-065 | REV 1

Drawing is reduced. Do not scale.

Notes:
1. Material: 0.187" A36 steel
2. FL = Front Left, FR = Front Right
3. RL = Rear Left, RR = Rear Right
4. Remove (8) M10 button head hex screws (four per side of loudspeaker) and reuse to attach brackets
5. Place (8) M10 flat & split washers (supplied with LBK230 kit) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/18/26

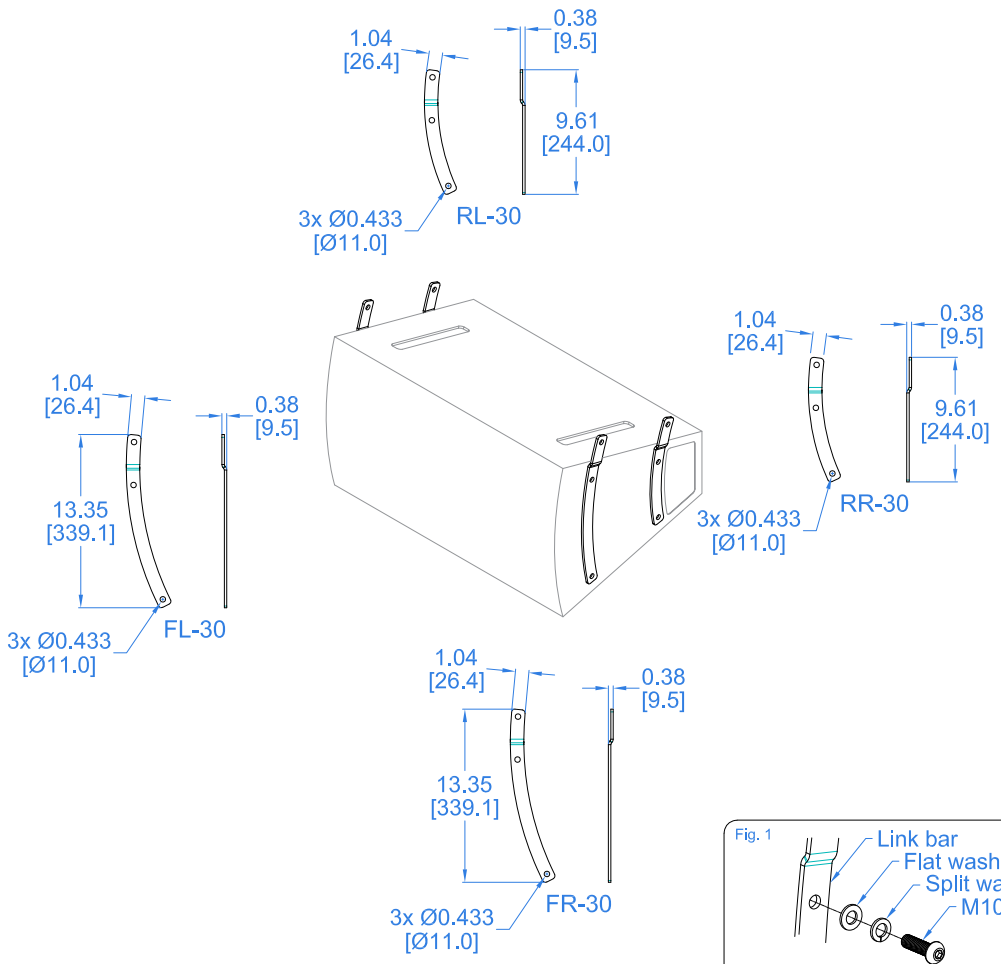

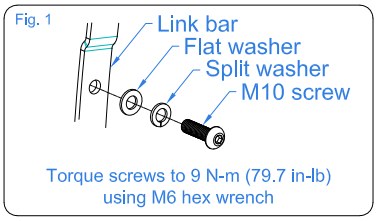



THIRD ANGLE PROJECTION THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING. DRAWN BY: RAF DATE: 03/18/26	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA TITLE: Mech Spec, LBK230 Link Bar Kit A | SHEET 1 OF 1 | SCALE: 1 : 12 DWG. NO. 820-300-066 | REV 1

Drawing is reduced. Do not scale.

Notes:
1. Material: 0.187" A36 steel
2. Kit includes (2) front and (2) rear brackets
3. Remove (8) M10 button head hex screws (four per side of loudspeaker) and reuse to attach brackets
4. Place (8) M10 flat & split washers (supplied with LBK230-AY kit) as shown in Fig. 1 and tighten screws to specified torque

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	New Issue	RAF 03/18/26

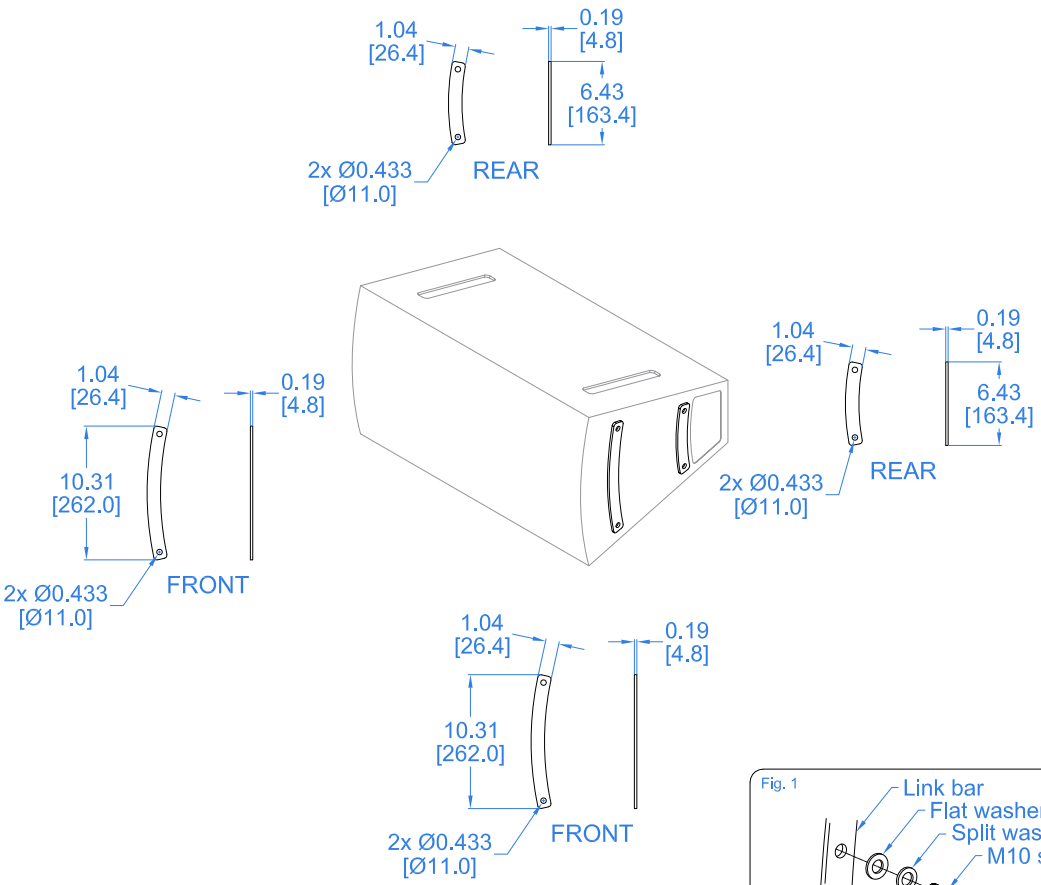

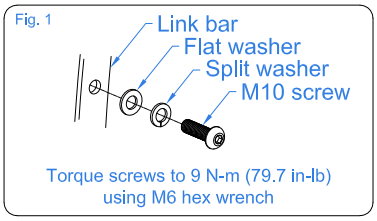

THIRD ANGLE PROJECTION  THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING. DRAWN BY: RAF DATE: 03/18/26	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES X.X±.1 X.XX±.015 X.XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2° (X.XX) = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL	FULCRUM ACOUSTIC, LLC 1 MAIN STREET, WHITINSVILLE, MA 01588 USA TITLE: Mech Spec, LBK230-AY Link Bar Kit A SHEET 1 OF 1 SCALE: 1 : 12 DWG. NO. 820-300-067 REV 1

Drawing is reduced. Do not scale.